
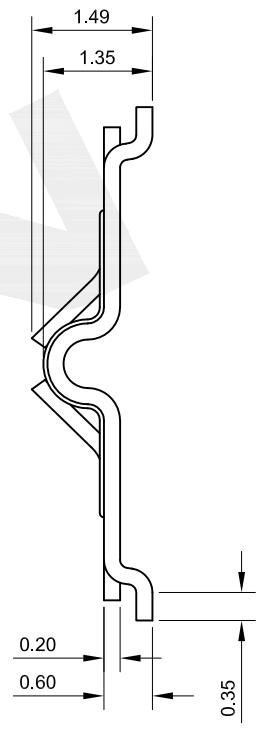


PCB LAYOUT

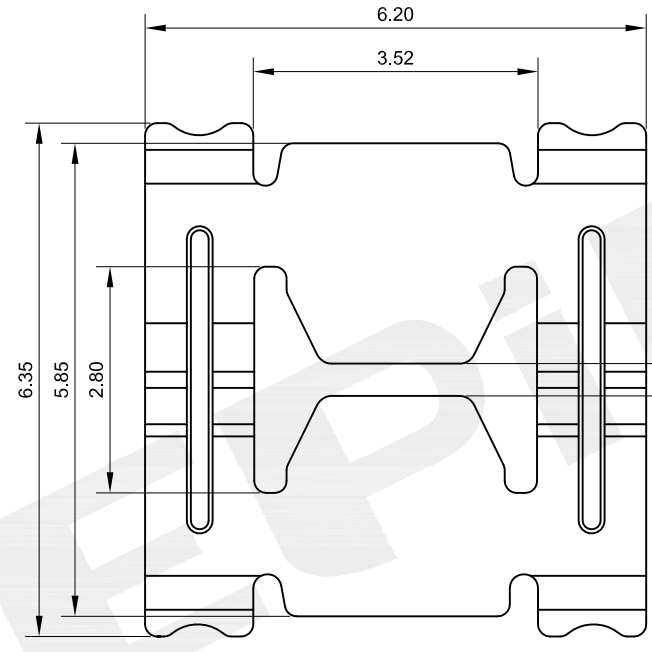

NOTES:
 CONTACT MATERIAL: PHOSPHOR BRONZE OR BRASS
 VOLTAGE RATING: 275V.AC/DC
 CURRENT RATING: 1A
 CONTACT RESISTANCE: $\leq 60m\Omega$
 INSULATION RESISTANCE: $\geq 1000M\Omega$
 WITHSTANDING VOLTAGE: 500V.AC/1MIN
 DURABILITY: ≥ 100 MATING CYCLES
 TEMPERATURE RANGE: $-25^{\circ}C-105^{\circ}C$

PART NO: 1009-04MSN01
 SN: TIN

					OPERATION	DRAW	Loong	20181128	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司		
					X.X	± 0.40			UNIT	mm	DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MAIL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036		
					X.XX	± 0.25	DESIGN	Jensen	20181128	SIZE	A4	PART NO.	1009-04MSN01
A/1	20181128	NEW	Loong	Andy	X.XXX	± 0.15	CHECK	Jack	20181128	SHEET	1/2	TITLE:	LED CONNECTOR
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	$\pm 3^{\circ}$	APPROVE	Andy	20181128	PROJ.		DWG.No.	
					DIM	TOL							