



PCB LAYOUT

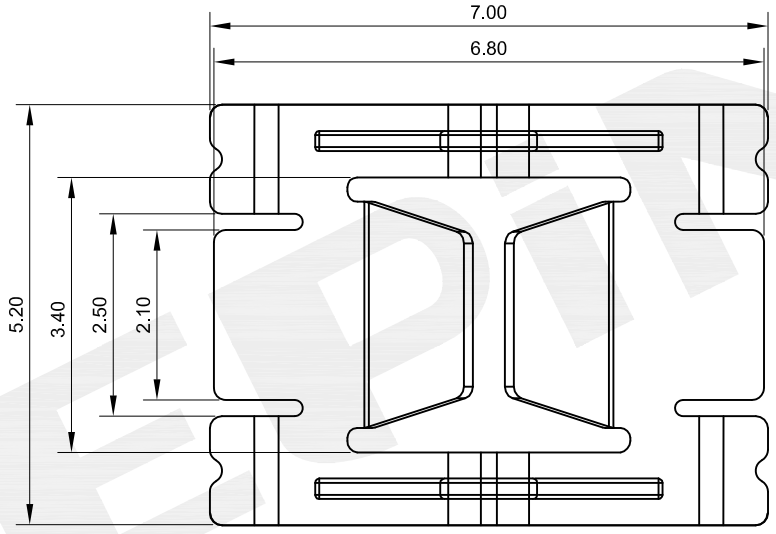

NOTES:
 CONTACT MATERIAL:BRASS
 VOLTAGE RATING:275V.AC/DC
 CURRENT RATING:1A
 CONTACT RESISTANCE:≤60mΩ
 INSULATION RESISTANCE:≥100MΩ
 WITHSTANDING VOLTAGE:500V.AC/1MIN
 DURABILITY:≥100 MATING CYCLES
 TEMPERATURE RANGE: -25℃-105℃

PART NO:1003 - A00MXX02

SN:TIN

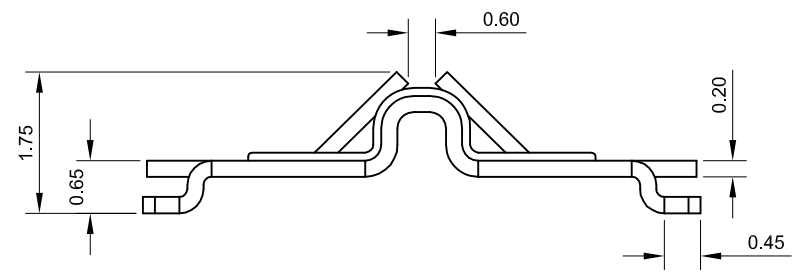

					OPERATION	DRAW	Loong	2017.11.16	SCALE	FIT	SOLEPIN 东莞市硕品电子有限公司 DONGGUAN SOLEPIN ELECTRONICS CO., LTD. Specializing in the production of connectors and wiring harness products. HTTP://WWW.SOLEPIN.COM E-MAIL:SALES@SOLEPIN.COM TEL:0769-83003805 FAX:0769-83003036
					X.X ±0.40	DESIGN	Jensen	2017.11.16	UNIT	mm	
					X.XX ±0.25	CHECK	Jack	2017.11.16	SIZE	A4	
					X.XXX ±0.15	APPROVE	Andy	2017.11.16	SHEET	1/2	
A/1	2017.11.16	NEW	Loong	Andy	Angle ±3°				PROJ.	⊕	PART NO. 1003-A00MXX02
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL						TITLE: LED CONNECTOR