

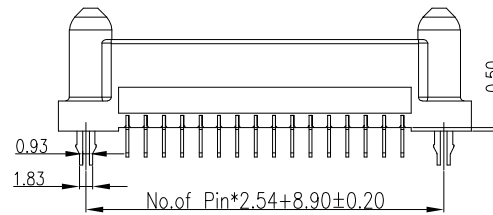
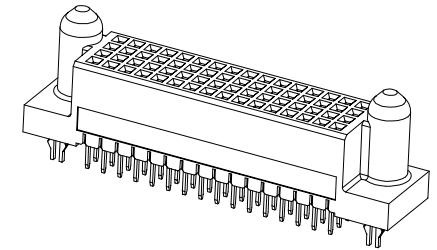


客户图



NOTES:

1. FINISH:
 - 1.1 HOUSING: Polyester(PA9T),UL94 V-0
 - 1.2 CONTACT: COPPER ALLOY, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 3.0 AMP,AC/DC
 - 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 1000V,AC/Minute
 - 2.3 CONTACT RESISTANCE: 80mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 2000 mΩ Min
 - 2.5 Operation Temperature:-40°C to +125°C
3. SALT SPRAY TEST:
 - 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 12H MIN, NO OXIDATION OR RUST
4. Max Processing Temp: 265°C Seconds 40S
5. ORDER INFORMATION:

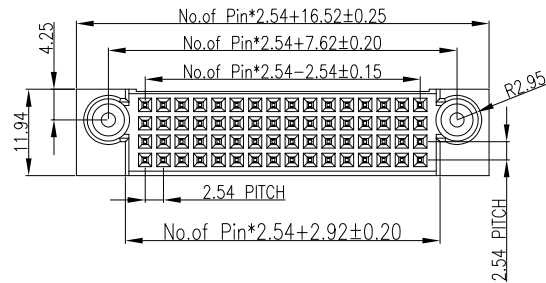


62H1V-F XXX XX 127 R 01

Pin 数码	端子电镀:	塑胶高度:	包装方式:
012=4x3PIN	S1=1u" Gold/Tin	127=12.70mm	R=TAPE REEL
.....	S2=3u" Gold/Tin		
064=4*16PIN	S3=5u" Gold/Tin		
.....	S4=10u" Gold/Tin		
128=4*32PIN	S5=15u" Gold/Tin		
	S6=30u" Gold/Tin		



MATING HEIGHT

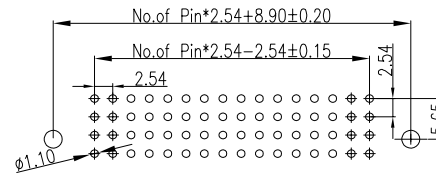

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

					OPERATION	DRAW	MR.Zeng	2021.02.29	SOLEPIN 东莞市硕品电子有限公司				
					X.X ±0.40	DESIGN	Jensen	2021.02.29	Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
					X.XX ±0.25	CHECK	Jack	2021.02.29	SIZE	A4	PART NO.	62H1V-F XXX XX 127 R 01	
					X.XXX ±0.15	APPROVE	Andy	2021.02.29	SHEET	1/1	TITLE:	62H1 电源连接器 2.54mm信号 DIP 180°	
AO		NEW			Angle ±3°	UNIT	mm	SCALE	1:1	PROJ.	DRAW NO.	SP-883	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM. TOL								

客户图

NOTES:

1.FINISH:

- 1.1 HOUSING: Polyester(PA9T),UL94 V-0
- 1.2 CONTACT: COPPER ALLOY, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING: 3.0 AMP,AC/DC
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 1000V,AC/Minute
- 2.3 CONTACT RESISTANCE: 80mΩ MAX.
- 2.4 INSULATION RESISTANCE: 2000 mΩ Min
- 2.5 Operation Temperature:-40°C to +125°C

3.SALT SPRAY TEST:







- 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 12H MIN,NO OXIDATION OR RUST

4.Max Processing Temp:265°C Seconds 40S


5.ORDER INFORMATION:

62H1-M XXX XX 145 R 01

Pin数码	端子电镀:	塑胶高度:	包装方式:
012=4x3PIN	S1=1u" Gold/Tin	145=14.58mm	R=TAPE REEL
.....	S2=3u" Gold/Tin		
064=4*16PIN	S3=5u" Gold/Tin		
.....	S4=10u" Gold/Tin		
128=4*32PIN	S5=15u" Gold/Tin		
	S6=30u" Gold/Tin		

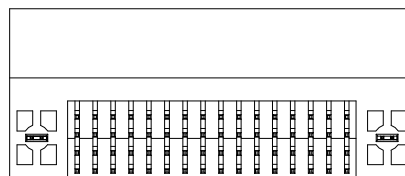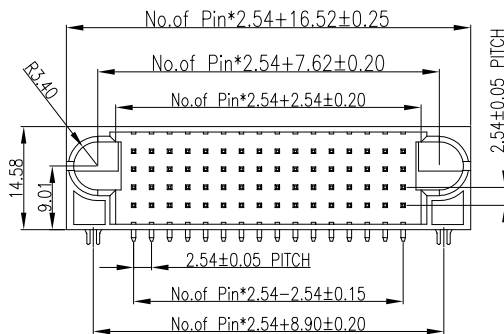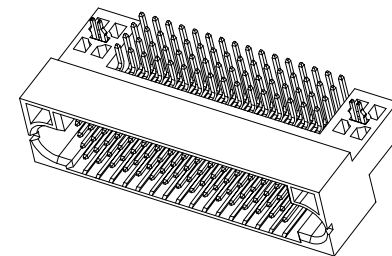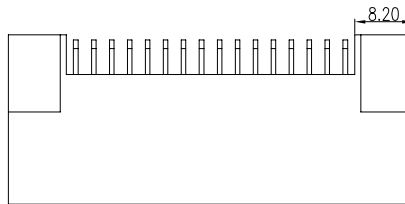

MATING HEIGHT

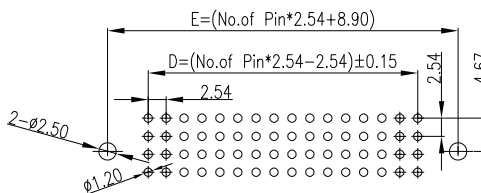

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

				OPERATION		DRAW		MR.Zeng		2021.02.29		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
				X.X	±0.40	DESIGN		Jensen		2021.02.29					
				X.XX	±0.25	CHECK		Jack		2021.02.29		SHEET	1/1	TITLE:	62H1电源连接器 2.54mm信号 DIP 90°
AO		NEW		X.XXX	±0.15	APPROVE		Andy		2021.02.29		PROJ.	☉	DRAW NO.	SP-884
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1					