

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: C7025, GOLD (SEE P/N) PLATED IN CONTACT AERA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:12Amp;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/DC.
- 2.3 CONTACT RESISTANCE: 20mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.

3. ALL MATERIALS MUST BE ROHS MATERIALS

4. ORDER INFORMATION:

61H5- R2 050 S2 267 C 01

2.54x5.08mm 90° 折弯


Pin数码
050=2*50PIN

端子电镀:
S0=Gold Flash/Tin
(半金锡)







塑胶高度:
267=26.75mm

包装方式:
C=TRAY

S1=1u" Gold/Tin
S2=3u" Gold/Tin
S3=5u" Gold/Tin
S4=10u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

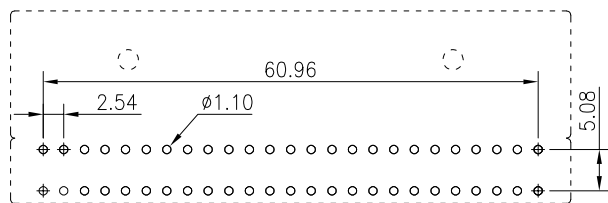

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

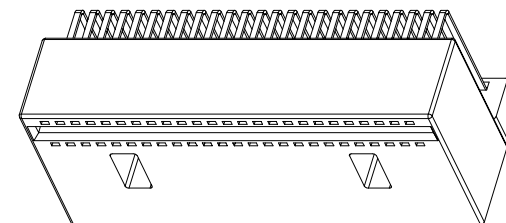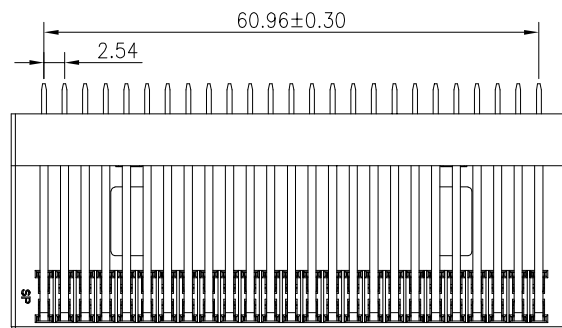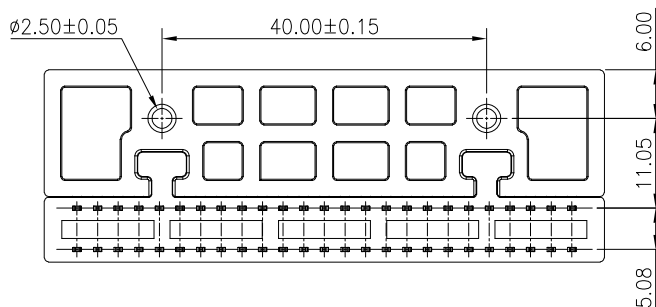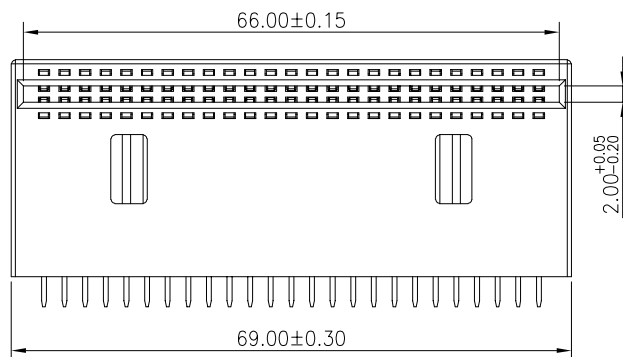

OPERATION		DRAW	WLY	2021.04.13
X.X	±0.40	DESIGN	Jensen	2021.04.13
X.XX	±0.25	CHECK	Jack	2021.04.13
X.XXX	±0.15	APPROVE	Andy	2021.04.13
Angle	±3°	UNIT	mm	SCALE 1:1
DIM.	TOL			

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

AO	NEW			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

SIZE	A4	PART NO.	61H5-R2050S2267C01
SHEET	1/1	TITLE:	2.54x5.08mm 金手指 DIP 90°
PROJ.	Φ	DRAW NO.	SP-435