

客户图

NOTES:

1. FINISH:

1.1 HOUSING: PA9T BLACK,UL94V-0.

1.2 CONTACT: C7025, GOLD (SEE P/N) PLATED IN CONTACT AERA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

2.1 CURRENT RATING:12Amp;

2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/DC.

2.3 CONTACT RESISTANCE: 20mΩ MAX.

2.4 INSULATION RESISTANCE: 1000MΩ MIN.

2.5 OPERATION TEMPERATURE:-40°C TO +105°C.

3. ALL MATERIALS MUST BE ROHS MATERIALS

4. ORDER INFORMATION:







61H4- S XXX XX 155 C 01

180° 直插

Pin数码
SEE TABLE
006=2*3PIN
~
100=2*50PIN端子电镀:
S0=Gold Flash/Tin
(半金锡)塑胶高度:
155=15.5mm包装方式:
C=TRAYS1=1u" Gold/Tin
S2=3u" Gold/Tin
S3=5u" Gold/Tin
S4=10u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

TABLE

No. OF PIN	A	B	C
006=2x3PIN	5.08	10.12	14.42
008=2x4PIN	7.62	12.66	16.96
010=2x5PIN	10.16	15.20	19.50
012=2x6PIN	12.70	17.74	22.04
014=2x7PIN	15.24	20.28	24.58
016=2x8PIN	17.78	22.82	27.12
018=2x9PIN	20.32	25.36	29.66
020=2x10PIN	22.86	27.90	32.20
022=2x11PIN	25.40	30.44	34.74
024=2x12PIN	27.94	32.98	37.28

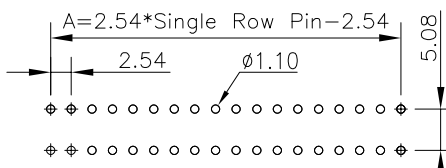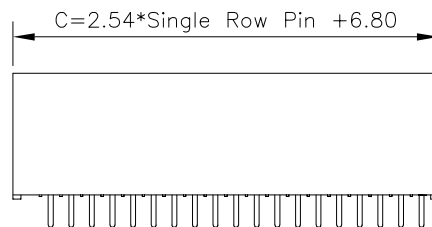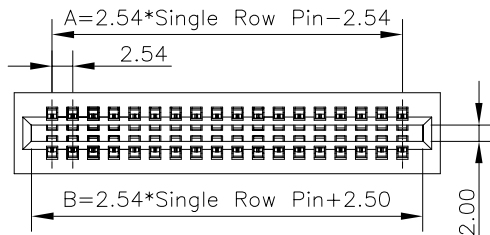RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

No. OF PIN	A	B	C
026=2x13PIN	30.48	35.52	39.82
028=2x14PIN	33.02	38.06	42.36
030=2x15PIN	35.56	40.60	44.90
032=2x16PIN	38.10	43.14	47.44
034=2x17PIN	40.64	45.68	49.98
036=2x18PIN	43.18	48.22	52.52
038=2x19PIN	45.72	50.76	55.06
040=2x20PIN	48.26	53.30	57.60
042=2x21PIN	50.80	55.84	60.14
044=2x22PIN	53.34	58.38	62.68
046=2x23PIN	55.88	60.92	65.22
048=2x24PIN	58.42	63.46	67.76
050=2x25PIN	60.96	66.00	70.30
052=2x26PIN	63.50	68.54	72.84
054=2x27PIN	66.04	71.08	75.38
056=2x28PIN	68.58	73.62	77.92
058=2x29PIN	71.12	76.16	80.46
060=2x30PIN	73.66	78.70	83.00
062=2x31PIN	76.20	81.24	85.54
064=2x32PIN	78.74	83.78	88.08
066=2x33PIN	81.28	86.32	90.62
068=2x34PIN	83.82	88.86	93.16
070=2x35PIN	86.36	91.40	95.70
072=2x36PIN	88.90	93.94	98.24
074=2x37PIN	91.44	96.48	100.78
076=2x38PIN	93.98	99.02	103.32
078=2x39PIN	96.52	101.56	105.86
080=2x40PIN	99.06	104.10	108.40
082=2x41PIN	101.60	106.64	110.94
084=2x42PIN	104.14	109.18	113.48
086=2x43PIN	106.68	111.72	116.02
088=2x44PIN	109.22	114.26	118.56
090=2x45PIN	111.76	116.80	121.10
092=2x46PIN	114.30	119.34	123.64
094=2x47PIN	116.84	121.88	126.18
096=2x48PIN	119.38	124.42	128.72
098=2x49PIN	121.92	126.96	131.26
100=2x50PIN	124.46	129.50	133.80

					OPERATION		DRAW		WLY		2021.02.03		SOLEPiN 东莞市硕品电子有限公司 PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
					X.X	±0.40	DESIGN		Jensen		2021.02.03						
					X.XX	±0.25	CHECK		Jack		2021.02.03						
					X.XXX	±0.15	APPROVE		Andy		2021.02.03						
A0		NEW		——	——	Angle	±3'					SHEET	1/1	TITLE:		2.54mm 金手指 DIP 180° 加厚款 PIN针外露3.5	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.		SP-431	

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: PA9T BLACK,UL94V-0.
- 1.2 CONTACT: C7025, GOLD (SEE P/N) PLATED IN CONTACT AERA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:12Amp;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/DC.
- 2.3 CONTACT RESISTANCE: 20mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.

3. ALL MATERIALS MUST BE ROHS MATERIALS

4. ORDER INFORMATION:

61H4- R1 XXX XX 100 C 01

2.54x2.54mm 90° 折弯

Pin数码
SEE TABLE
006=2*3PIN
100=2*50PIN





端子电镀:
S0=Gold Flash/Tin
(半金锡)
S1=1u" Gold/Tin
S2=3u" Gold/Tin
S3=5u" Gold/Tin
S4=10u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

塑胶高度:
100=10.0mm




包装方式:
C=TRAY

TABLE

No. OF PIN	A	B	C
006=2x3PIN	5.08	10.12	14.42
008=2x4PIN	7.62	12.66	16.96
010=2x5PIN	10.16	15.20	19.50
012=2x6PIN	12.70	17.74	22.04
014=2x7PIN	15.24	20.28	24.58
016=2x8PIN	17.78	22.82	27.12
018=2x9PIN	20.32	25.36	29.66
020=2x10PIN	22.86	27.90	32.20
022=2x11PIN	25.40	30.44	34.74
024=2x12PIN	27.94	32.98	37.28

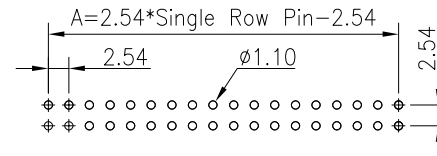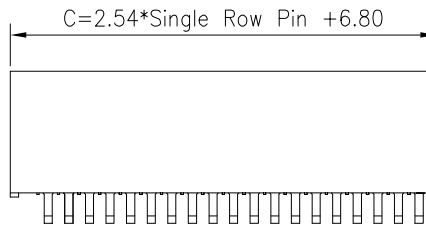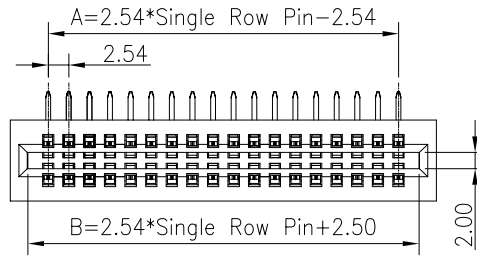

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05



No. OF PIN	A	B	C
026=2x13PIN	30.48	35.52	39.82
028=2x14PIN	33.02	38.06	42.36
030=2x15PIN	35.56	40.60	44.90
032=2x16PIN	38.10	43.14	47.44
034=2x17PIN	40.64	45.68	49.98
036=2x18PIN	43.18	48.22	52.52
038=2x19PIN	45.72	50.76	55.06
040=2x20PIN	48.26	53.30	57.60
042=2x21PIN	50.80	55.84	60.14
044=2x22PIN	53.34	58.38	62.68
046=2x23PIN	55.88	60.92	65.22
048=2x24PIN	58.42	63.46	67.76
050=2x25PIN	60.96	66.00	70.30
052=2x26PIN	63.50	68.54	72.84
054=2x27PIN	66.04	71.08	75.38
056=2x28PIN	68.58	73.62	77.92
058=2x29PIN	71.12	76.16	80.46
060=2x30PIN	73.66	78.70	83.00
062=2x31PIN	76.20	81.24	85.54
064=2x32PIN	78.74	83.78	88.08
066=2x33PIN	81.28	86.32	90.62
068=2x34PIN	83.82	88.86	93.16
070=2x35PIN	86.36	91.40	95.70
072=2x36PIN	88.90	93.94	98.24
074=2x37PIN	91.44	96.48	100.78
076=2x38PIN	93.98	99.02	103.32
078=2x39PIN	96.52	101.56	105.86
080=2x40PIN	99.06	104.10	108.40
082=2x41PIN	101.60	106.64	110.94
084=2x42PIN	104.14	109.18	113.48
086=2x43PIN	106.68	111.72	116.02
088=2x44PIN	109.22	114.26	118.56
090=2x45PIN	111.76	116.80	121.10
092=2x46PIN	114.30	119.34	123.64
094=2x47PIN	116.84	121.88	126.18
096=2x48PIN	119.38	124.42	128.72
098=2x49PIN	121.92	126.96	131.26
100=2x50PIN	124.46	129.50	133.80

					OPERATION		DRAW		WLY		2021.02.03		SOLEPIN 东莞市硕品电子有限公司 PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Jensen		2021.02.03					
					X.XX	±0.25	CHECK		Jack		2021.02.03					
					X.XXX	±0.15	APPROVE		Andy		2021.02.03					
AO			NEW	——	——	Angle	±3°					SHEET	1/1	TITLE:	2.54x2.54mm 金手指 DIP 90° 加厚款	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT		mm	SCALE	1:1	PROJ.		DRAW NO.	SP-431

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: PA9T BLACK,UL94V-0.
- 1.2 CONTACT: C7025, GOLD (SEE P/N) PLATED IN CONTACT AERA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- 2.1 CURRENT RATING:12Amp;
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/DC.
- 2.3 CONTACT RESISTANCE: 20mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 OPERATION TEMPERATURE:-40°C TO +105°C.

3. ALL MATERIALS MUST BE ROHS MATERIALS

4. ORDER INFORMATION:

61H4- R2 XXX XX 100 C 02

2.54x5.08mm 90° 折弯

Pin数码
SEE TABLE
006=2*3PIN
100=2*50PIN

端子电镀:
S0=Gold Flash/Tin
(半金锡)





塑胶高度:
100=10.0mm

包装方式:
C=TRAY




S1=1u" Gold/Tin
S2=3u" Gold/Tin
S3=5u" Gold/Tin
S4=10u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

TABLE

No. OF PIN	A	B	C
006=2x3PIN	5.08	10.12	14.42
008=2x4PIN	7.62	12.66	16.96
010=2x5PIN	10.16	15.20	19.50
012=2x6PIN	12.70	17.74	22.04
014=2x7PIN	15.24	20.28	24.58
016=2x8PIN	17.78	22.82	27.12
018=2x9PIN	20.32	25.36	29.66
020=2x10PIN	22.86	27.90	32.20
022=2x11PIN	25.40	30.44	34.74
024=2x12PIN	27.94	32.98	37.28

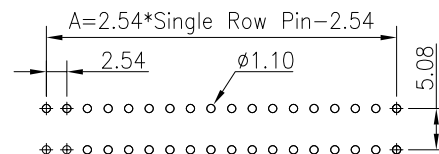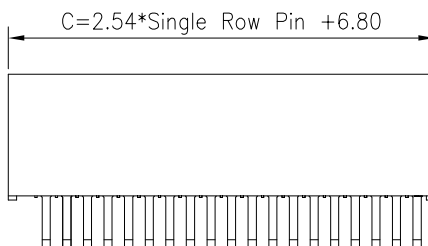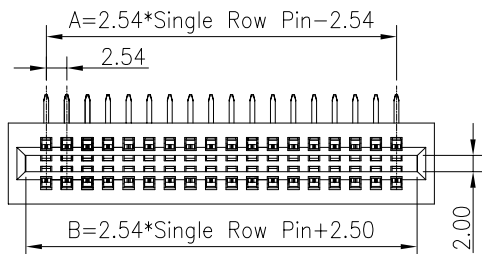

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05



No. OF PIN	A	B	C
026=2x13PIN	30.48	35.52	39.82
028=2x14PIN	33.02	38.06	42.36
030=2x15PIN	35.56	40.60	44.90
032=2x16PIN	38.10	43.14	47.44
034=2x17PIN	40.64	45.68	49.98
036=2x18PIN	43.18	48.22	52.52
038=2x19PIN	45.72	50.76	55.06
040=2x20PIN	48.26	53.30	57.60
042=2x21PIN	50.80	55.84	60.14
044=2x22PIN	53.34	58.38	62.68
046=2x23PIN	55.88	60.92	65.22
048=2x24PIN	58.42	63.46	67.76
050=2x25PIN	60.96	66.00	70.30
052=2x26PIN	63.50	68.54	72.84
054=2x27PIN	66.04	71.08	75.38
056=2x28PIN	68.58	73.62	77.92
058=2x29PIN	71.12	76.16	80.46
060=2x30PIN	73.66	78.70	83.00
062=2x31PIN	76.20	81.24	85.54
064=2x32PIN	78.74	83.78	88.08
066=2x33PIN	81.28	86.32	90.62
068=2x34PIN	83.82	88.86	93.16
070=2x35PIN	86.36	91.40	95.70
072=2x36PIN	88.90	93.94	98.24
074=2x37PIN	91.44	96.48	100.78
076=2x38PIN	93.98	99.02	103.32
078=2x39PIN	96.52	101.56	105.86
080=2x40PIN	99.06	104.10	108.40
082=2x41PIN	101.60	106.64	110.94
084=2x42PIN	104.14	109.18	113.48
086=2x43PIN	106.68	111.72	116.02
088=2x44PIN	109.22	114.26	118.56
090=2x45PIN	111.76	116.80	121.10
092=2x46PIN	114.30	119.34	123.64
094=2x47PIN	116.84	121.88	126.18
096=2x48PIN	119.38	124.42	128.72
098=2x49PIN	121.92	126.96	131.26
100=2x50PIN	124.46	129.50	133.80

					OPERATION		DRAW		WLY		2021.02.03		SOLEPIN 东莞市硕品电子有限公司 PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.							
					X.X	±0.40	DESIGN		Jensen		2021.02.03									
					X.XX	±0.25	CHECK		Jack		2021.02.03						SIZE	A4	PART NO.	61H4-R2XXXXX100C02
					X.XXX	±0.15	APPROVE		Andy		2021.02.03						SHEET	1/1	TITLE:	2.54x5.08mm 金手指 DIP 90° 加厚款
A0			NEW	——	——	Angle	±3°													
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-431					