

客户图

NOTES:

1.FINISH:

- 1.1 HOUSING: LCP BLACK,UL94 V-0
- 1.2 CONTACT: SIGNAL PIN C18400, POWER PIN C18400, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

- 1.3 GROUND: BRASS, 80u" MIN MATTE TIN PLATED OVER

2. ELECTRICAL:

- 2.1 CURRENT RATING: SIGNAL PIN 10 A (UL)
POWER PIN 55 A (UL)
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE:
SIGNAL PIN DC 500V FOR 1 MINUTE
POWER PIN DC 1000V FOR 1 MINUTE
- 2.3 CONTACT RESISTANCE: SIGNAL PIN 25mΩ MAX.
POWER PIN 0.6mΩ MAX.
- 2.4 INSULATION RESISTANCE: SIGNAL PIN 500mΩ Min
POWER PIN 5000mΩ Min
- 2.5 Operation Temperature:-55°C to +125°C

3.SALT SPRAY TEST:





- 3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C,
TEST TIME 8H MIN,NO OXIDATION OR RUST

4.Max Processing Temp:265°C Seconds 40S






5.ORDER INFORMATION:

61H11-R2 014 S2 012 085 C 01

信号PIN: 004=2X2PIN 020=2X10PIN
端子电镀: S0=Gold Flash/Tin S2=3u" Gold/Tin S3=5u" Gold/Tin S4=10u" Gold/Tin S5=15u" Gold/Tin S6=30u" Gold/Tin
塑胶高度: 085=8.50mm
包装方式: C=TRAY
电源PIN: 004=2X2PIN 020=2X10PIN

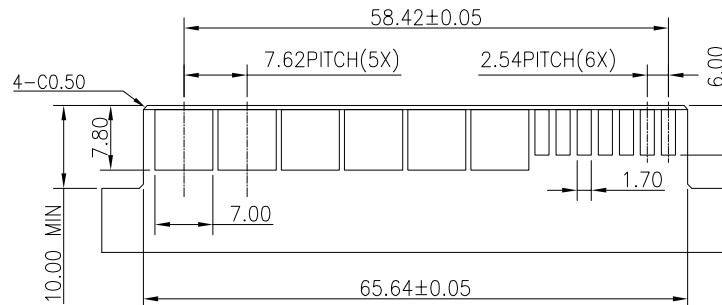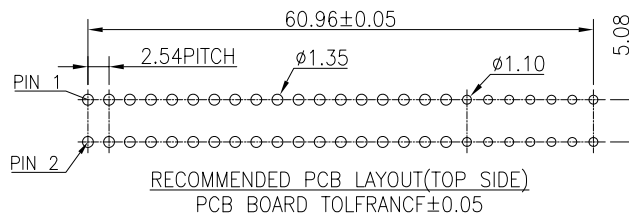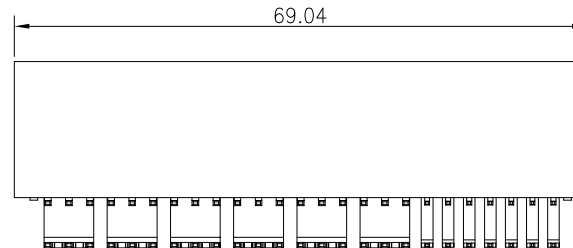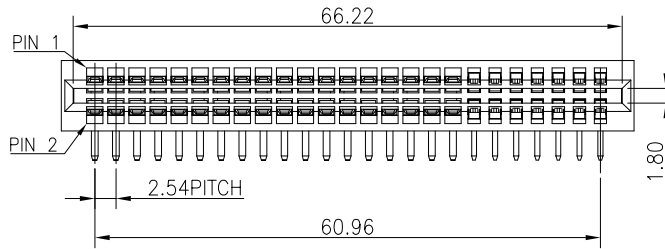

ROMMENDED PLUG-PCB LAYOUT
TOLERANCE ±0.05

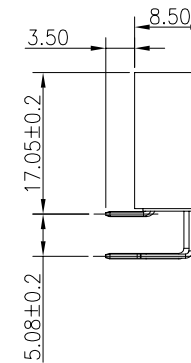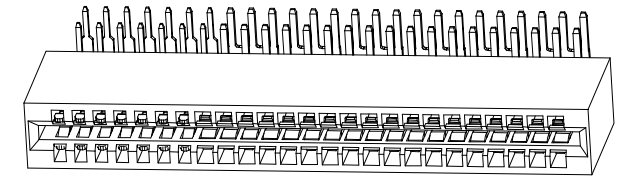

					OPERATION		DRAW		Mr.Zeng		2024.05.23		SOLEPiN 东莞市硕品电子有限公司 PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.			
					X.X	±0.40	DESIGN		Mr.Zeng		2024.05.23					
					X.XX	±0.25	CHECK		Mr.Deng		2024.05.23		SIZE	A4	PART NO.	61H11-R2 014 S2 012 085 C 01
A0		NEW	_____	_____	X.XXX	±0.15	APPROVE		Mr.Wang		2024.05.23		SHEET	1/1	TITLE:	61H11 2.54信号+7.62电源连接器 DIP 90°
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.		DRAW NO.	SP-1714	