

# 客户图

## NOTES:

### 1. MATERIAL:

- 1.1 HOUSING: RESISTANT THERMOPLASTIC GREY, UL94V-0.
- 1.2 CONTACT: HIGH PERFORMANCE COPPER, GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

### 2. ELECTRICAL:

- 2.1 VOLTAGE RATING: 300V;
- 2.2 CURRENT RATING: 6A;
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
- 2.4 CONTACT RESISTANCE: 20mΩ MAX.
- 2.5 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.6 OPERATION TEMPERATURE: -40°C TO +105°C.

### 3. ORDER INFORMATION:

61H2- S XXX XX 155 C 01

180° 直插








Pin数码: SEE TABLE  
006=2\*3PIN  
~  
100=2\*50PIN

端子电镀:  
G0=Gold Flash  
G1=1u" Gold  
G2=3u" Gold  
G3=5u" Gold  
S0=Gold Flash/Tin  
S1=1u" Gold/Tin  
S2=3u" Gold/Tin  
S3=5u" Gold/Tin  
S4=10u" Gold/Tin  
S5=15u" Gold/Tin  
S6=30u" Gold/Tin


塑胶高度: 155=15.5mm  
包装方式: C=TRAY

TABLE1:

No. OF PIN	A	B	C
006=2x3PIN	10.22	5.08	14.42
008=2x4PIN	12.76	7.62	16.96
010=2x5PIN	15.30	10.16	19.50
012=2x6PIN	17.84	12.70	22.04
016=2x8PIN	22.92	17.78	27.12
032=2x16PIN	43.24	38.10	47.44
050=2x25PIN	66.10	60.96	70.30
.....			
100=2x50PIN	129.60	124.46	133.80

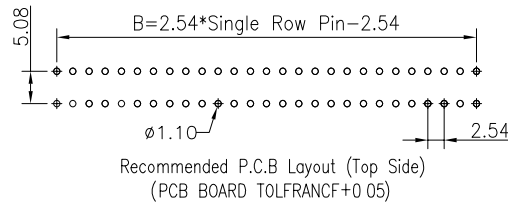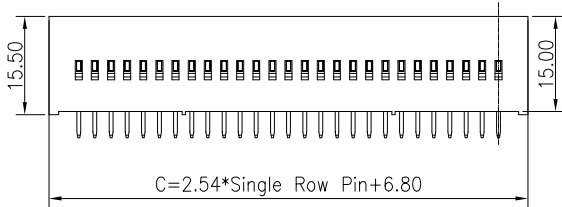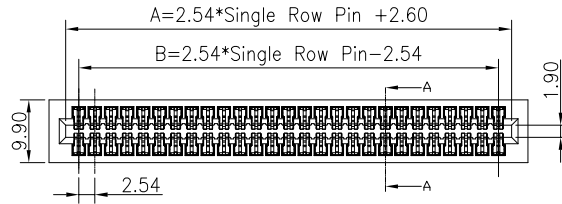

SECTION:A-A

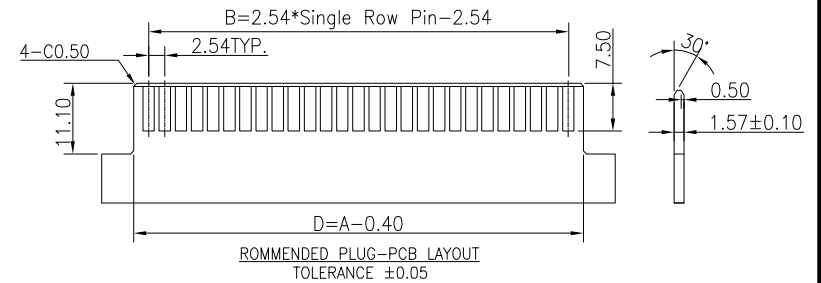

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WLY	SCALE	UNIT	mm	SCALE	1:1	PROJ.	SIZE	A4	PART NO.	TITLE:	DRAW NO.	
					OPERATION	DRAW	WLY	2021.04.08						<b>SOLEPIN</b> 东莞市硕品电子有限公司 <b>PROFESSIONAL CONNECTOR</b> DONGGUAN SOLEPIN ELECTRONICS CO., LTD.					
					X.X ±0.40	DESIGN	Jensen	2021.04.08											
					X.XX ±0.25	CHECK	Jack	2021.04.08											
					X.XXX ±0.15	APPROVE	Andy	2021.04.08											
AO		NEW			Angle ±3°									SHEET	1/1			2.54mm 金手指 DIP 180° PIN针外露3.60mm	
					DIM. TOL									PROJ.	Φ			SP-379	

# 客户图

## NOTES:

### 1. MATERIAL:

- 1.1 HOUSING: RESISTANT THERMOPLASTIC GREY, UL94V-0.
- 1.2 CONTACT: HIGH PERFORMANCE COPPER, GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

### 2. ELECTRICAL:

- 2.1 VOLTAGE RATING: 300V;
- 2.2 CURRENT RATING: 6A;
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
- 2.4 CONTACT RESISTANCE: 20mΩ MAX.
- 2.5 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.6 OPERATION TEMPERATURE: -40°C TO +105°C.

### 3. ORDER INFORMATION:





61H2- R1 XXX XX 099 C 01

2.54x2.54mm  
90° 折弯




Pin 数码 SEE TABLE 006=2*3PIN ~ 100=2*50PIN	端子电镀: G0=Gold Flash G1=1u" Gold G2=3u" Gold G3=5u" Gold S0=Gold Flash/Tin S1=1u" Gold/Tin S2=3u" Gold/Tin S3=5u" Gold/Tin S4=10u" Gold/Tin S5=15u" Gold/Tin S6=30u" Gold/Tin	塑胶高度: 155=15.5mm	包装方式: C=TRAY
---	---	---------------------	-----------------

TABLE 1:


No. OF PIN	A	B	C
006=2x3PIN	10.22	5.08	14.42
008=2x4PIN	12.76	7.62	16.96
010=2x5PIN	15.30	10.16	19.50
012=2x6PIN	17.84	12.70	22.04
016=2x8PIN	22.92	17.78	27.12
032=2x16PIN	43.24	38.10	47.44
050=2x25PIN	66.10	60.96	70.30
.....			
100=2x50PIN	129.60	124.46	133.80

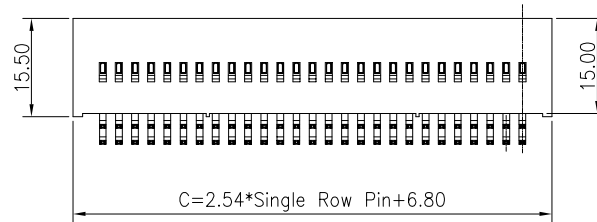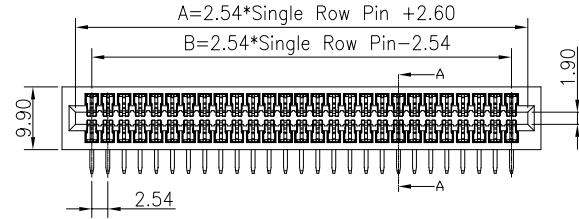

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLFRANCF+0.05)



SECTION: A-A

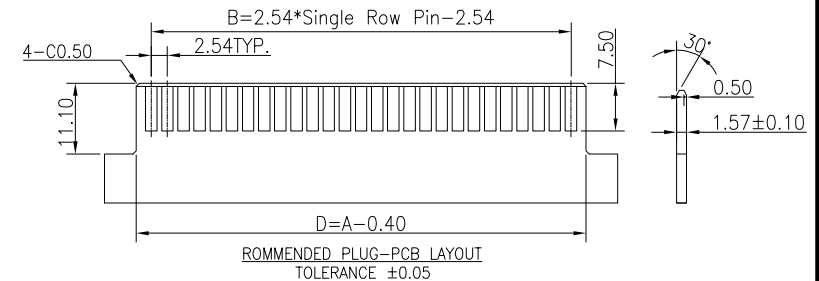

ROMMENDED PLUG-PCB LAYOUT  
TOLERANCE ±0.05

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WLY	2021.04.08		<b>SOLEPIN 东莞市硕品电子有限公司</b> <b>PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.</b>			
						X.X	±0.40	DESIGN	Jensen	2021.04.08				SIZE	A4
						X.XX	±0.25	CHECK	Jack	2021.04.08				PART NO.	61H2- R1 XXX XX 099 C 01
A0			NEW			X.XXX	±0.15	APPROVE	Andy	2021.04.08				SHEET	1/1
						Angle	±3°	UNIT	mm	SCALE	1:1	TITLE:	2.54x2.54mm 金手指 DIP 90°		
						DIM.	TOL	PROJ.	☉	DRAW NO.	SP-378				

# 客户图

## NOTES:

### 1. MATERIAL:

- 1.1 HOUSING: RESISTANT THERMOPLASTIC GREY, UL94V-0.
- 1.2 CONTACT: HIGH PERFORMANCE COPPER, GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.

### 2. ELECTRICAL:

- 2.1 VOLTAGE RATING: 300V;
- 2.2 CURRENT RATING: 6A;
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
- 2.4 CONTACT RESISTANCE: 20mΩ MAX.
- 2.5 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.6 OPERATION TEMPERATURE: -40°C TO +105°C.

### 3. ORDER INFORMATION:







61H2- R2 XXX XX 099 C 01

2.54x5.08mm  
90° 折弯


Pin 数码 SEE TABLE 006=2*3PIN ~ 100=2*50PIN	端子电镀: G0=Gold Flash G1=1u" Gold G2=3u" Gold G3=5u" Gold S0=Gold Flash/Tin S1=1u" Gold/Tin S2=3u" Gold/Tin S3=5u" Gold/Tin S4=10u" Gold/Tin S5=15u" Gold/Tin S6=30u" Gold/Tin	塑胶高度: 099=9.90mm	包装方式: C=TRAY
---	---	---------------------	-----------------

TABLE 1:

No. OF PIN	A	B	C
006=2x3PIN	10.22	5.08	14.42
008=2x4PIN	12.76	7.62	16.96
010=2x5PIN	15.30	10.16	19.50
012=2x6PIN	17.84	12.70	22.04
016=2x8PIN	22.92	17.78	27.12
032=2x16PIN	43.24	38.10	47.44
050=2x25PIN	66.10	60.96	70.30
.....			
100=2x50PIN	129.60	124.46	133.80

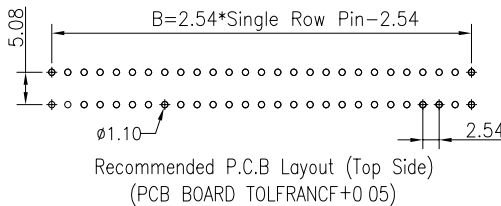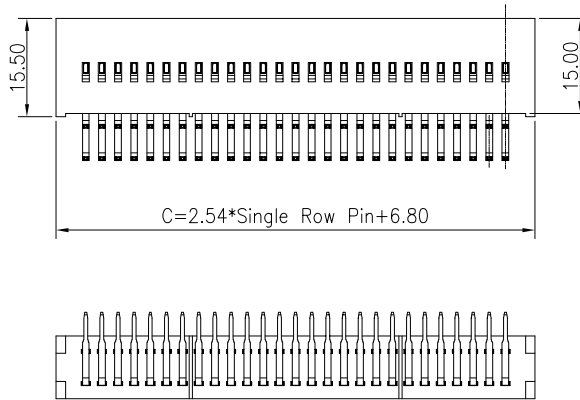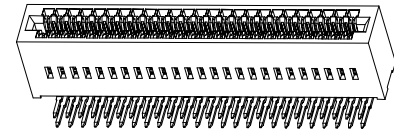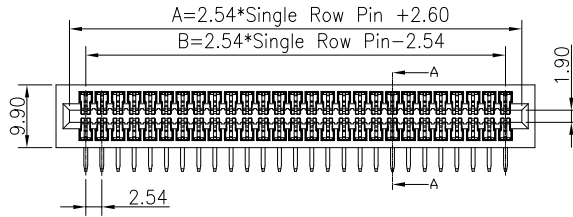

SECTION-A-A

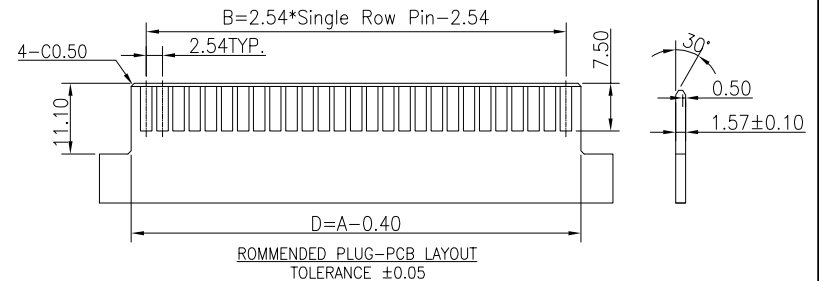

				OPERATION		DRAW		WLY		2021.04.08		<b>SOLEPIN 东莞市硕品电子有限公司</b> <b>PROFESSIONAL CONNECTOR DONGGUAN SOLEPIN ELECTRONICS CO., LTD.</b>			
				X.X	±0.40	DESIGN		Jensen		2021.04.08				SIZE	A4
				X.XX	±0.25	CHECK		Jack		2021.04.08		SHEET	1/1	TITLE:	2.54x5.08mm 金手指 DIP 90°
A0		NEW		X.XXX	±0.15	APPROVE		Andy		2021.04.08		PROJ.	☉	DRAW NO.	SP-371
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1				